




LightRanger™ 800 Mini


LED Telescoping Lantern

360 degree LED area lighting

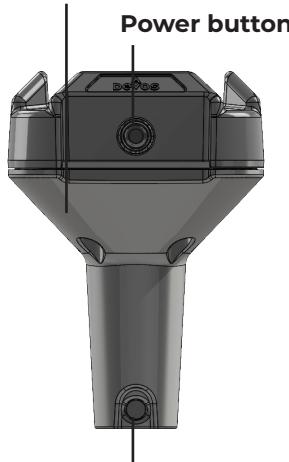

Snap button opening to hold light on pole

Hang point

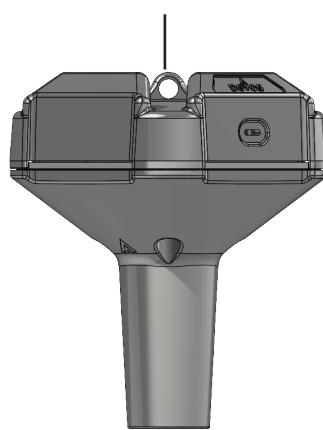

USB-C charging port power in and power out to charge other devices



Pole receiver

Power Button Function

| | |
|--------------------|--|
| Power On | Push once - full power |
| | Push twice - full power two sides |
| | Push three times - off |
| | |
| Dimmer | With power on (any side) hold for 3 seconds – Dims brightness down, pauses 2 seconds at lowest dim and then back up |
| Power Off | If light is on (3 seconds or more) push once – Off |
| Power Level | If light is off, hold for 3 seconds – Blinking LED indicates battery level with color. Red: 0-33% Yellow: 34-66% Green: 67-95% Solid Green: 100% |

DevosOutdoor.com

Devos 752 N 2250 W Springville, UT 84663

Model

DMP800CMini
Patent Pending
Designed in Utah
Made in China



Power

Input 5V 2A USB-C
Output 3.7V 2.4A USB-C
Li-ion battery 3.7V 5000 mAH
Store dry at room temperature and above 50% charge
for longest life
Charge temperature 32-113F degrees
Operating temperature range -4 to 113F



Warning

1. Do not submerge in water
2. Unplug when indicator light is solid green.
3. Contains Li-ion battery must be disposed of properly
4. Do not attempt repair or service
5. Do not operate in temperatures above 113F
6. Do not subject batteries to temperatures above 140F

DevosOutdoor.com/pages/warranty
DevosOutdoor.com/pages/patents

